

NVR L5000

Up to 16-ch IP cameras
up to 4k Ultra Hight Definition
H.265+ /H.264 video compression
Up to 8 TB capacity per HDD



RECORDING

Video Compression:	Support H265/H264/H265+/H264+
Encoding resolution:	4k(3840×2160),5MP(2592×1944),4MP(2688×1520/2560×1440),3MP(2048×1536),
Record Rate:	PAL :4K@8x25fps,5MP@16×25fp,4MP@16x25fp,3MP@16×25fp,1080P@16×25fp, 960P@16×25fp,720P@16×25fp, D1@16×25fp NTSC: 4K@8x30fps,5MP@16×30fp,4MP@16×30fp,3MP@16×30fp,1080P@16×30fp, 960P@16×30fp, 720P@16×30fp, D1@16×30fp
Record Mode:	Manual\Timer\Motion Detection\ Alarm\Motion and Alarm\Smart Event
Capability:	1-ch@32 MP (30 fps)/2-ch@12 MP (20 fps)/4-ch@8 MP (25 fps)/8-ch@4 MP (30fps)/16-ch@1080p (30 fps)
Dual stream recording :	Support

VIDEO AND AUDIO

IP video input:	16-ch Up to 4k Ultra Hight Definition H.265+ / H.264
Incoming bandwidth:	160 Mbps
Outgoing bandwidth:	256 Mbps
HDMI 1 output:	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output:	Resolution: 1920 × 1080P/60Hz, 1280 × 1024/60Hz, 1280 x720 /60Hz, 1024 × 768/60Hz
HD output:	Resolution:1024x768/60Hz, 1280x720/60Hz, 1280x1024/60Hz, 1920x1080/60Hz, 4K(3840x2160)/30Hz
Video output mode:	HDMI1/VGA simultaneous output, HDMI2/VGA independent output
Audio Input:	1 Port RCA
Audio output:	1 Port RCA(Linear, 1kΩ)
Audio Compression standard:	G711u, G711a, ADPCM_DV14
Intercom:	Support (two-way)

NVR L5000

Up to 16-ch IP cameras
Up to 8 TB capacity per HDD



Display Split: 16CHxD1/9CHxD1/8CHxD1/4CHxD1/1CHx1080P/1CHx3MP/
1CHx4MP/1CHx5MP/1CHx4k

Digital Zoom: Yes

OSD: Camera Title, Time, Recording, Motion Detection, Event Alarm

PLAYBACK & BACKUP

Local Sync Playback: 1CH 4K@30fps, 1CH 5MP@30fps, 2CH 4MP@30fps, 2CH 3M@30fps,
4CH 1080P@30fps, 4CH 960P@30fps, 4CH 720P@30fps, 9CH D1 @30fps

Decode Capability: 4CH 1080P(1920x1080)@30fps

Search Mode: All, channel, manual, time, date, motion detection, event alarm,
tag search

Playback Functions: Play, Pause, Stop, Rewind, Fast play, Slow Play, Full Screen, Frame Play,
Frame Rewind, Digital Zoom, tag, clip

Backup Mode: USB Device/Network

NETWORK

Network Protocol: TCP/IP, HTTP, HTTPS, UPnP, DNS, NTP, SMTP, DHCP, FTP, DDNS, RTSP,
RTCP, p2p, PPPOE

Interface : 1xRJ45 10M/100M Adaptive Ethernet Interface

CMS Software: Edge, IE8-11, Google Chrome, Firefox, Safari

Onvif Version: onvif S, onvif T

ALARM

Sensor Input: 16/4 Channel

Output: 1

Motion Detection: 16 Channel, MD Zones: 396 (22 × 18)

Trigger Events: Recording, Email, Screen tips, Buzzer, Push notifications
(motion detection)

Email Alarm: Send Image to the designated e-mail

AUXILIARY INTERFACE

Sata: 1 SATA Interface

Capacity: Up to 8TB capacity for each disk

Serial Interface: RS-485 (half-duplex)

Alarm in/out: 16/1

NVR L5000


Up to 16-ch IP cameras
Up to 8 TB capacity per HDD



GENERAL

USB Interface:	2 USB 2.0 Interfaces
Operation Temperature:	-10~55°C / 10~90%
Power Supply:	DC 12V/2A \leq 4W (Without Hard Disk)
Dimension:	26.0(W) x 21.5(H) x 4.3(D)mm
Weight:	2kg (Without HDD)

DIMENSIONS

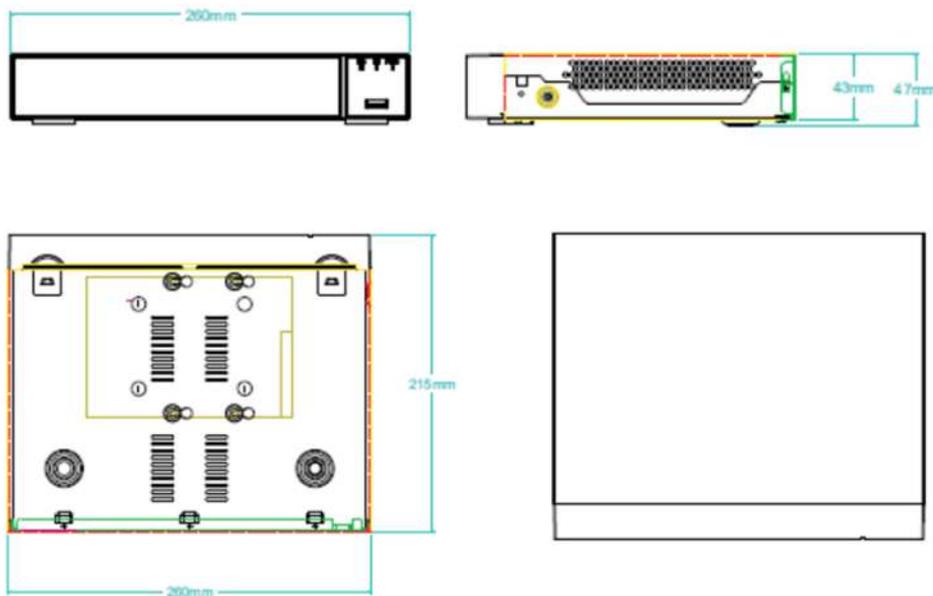

Derechos del autor ©Dley Seguridad Electronica S.A. Todos los derechos reservados.
Dley Seguridad Electronica S.A. puede realizar cambios, mejoras en los productos y servicios,
detener su producción o comercialización en cualquier momento y sin previo aviso.
El logo y la marca son propiedad de Dley Seguridad Electronica S.A.
Para más información puedes visitarnos:
Nuestra website: <https://www.dley.com.ec/> o <https://ventas.dley.com.ec/>
Email: ventas@dley.com.ec
Tel: (+593) 0985178133-0984638941

