

FIXED BULLET NETWORK 4 MP CAMERA DIM436

2560p x 1440 resolution
3.6 mm fixed focal lens
H.265+ Compression
Intelligent Analysis
DWDR
DNR
IP67
Smart IR



CAMERA

Image sensor:	1/3" Progressive Scan CMOS Sensor
TV System:	PAL/NTSC
Resolution:	4 MP
Effective Pixels:	2560 (H) 1440 (V)
Min. Illumination:	0.01Lux
Scanning System:	Progressive
Electronic Shutter:	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
S/N Ratio:	≥60dB
Image Config:	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR White Balance, FLK(Flicker Control), Video Tampering, Distortion
Corridor Pattern:	Support
Digital noise:	DNR
WDR:	DWDR: 50dB
ROI:	Support
BLC:	Support
Audio:	Optional 1 Built-in MIC/Optional Audio IN/Optional Audio IN/OUT
Motion Detection:	Support (Support enable the detection based on human movement only)
Privacy Masking:	3 Rectangular Zone
Recording Mode:	NVR/CMS/Web

AI FUNCTION

Intelligent Analysis: Intrusion Detetion,motion detection based on human detection

LENS

Focus Length:	3.6 mm
Focus Control:	Fixed
Lens Type:	Fixed
Pixels:	4 MP

FIXED BULLET NETWORK 4 MP CAMERA DIM436



IR

IR Range: Up to 25 m
IR Status: Auto Control
Day/Night: Color/ B&W (IR-CUT)
Infrared LED: 42 μ x 2PCS
IR Power On: Smart, Manual & Timed mode

VIDEO

Video Compression: H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG

Main Stream: 2688*1512@25fps
2560*1440@25fps
1920*1080@30fps
1280*720@30fps

Sub-Stream: 720*480@25fps
720*480@30fps
352*288@25fps
352*288@30fps

H.264 Type: Baseline Profile/Main Profile/High Profile
H.264+: Main stream supports

H.265 Type: Main Profile
H.265+: Main stream supports

Video Bit Rate: 32 Kbps to 16 Mbps

NETWORK

Protocol: TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, , SMTP, UDP, SNMP

ONVIF: Support ONVIF 2.4(Profile S/T/G)

Ethernet: RJ-45 (10/100Base-T)

POE: Internal, Support IEEE 802.3af

P2P: YES, Support QR Code

Video Delay: 0.3S (Within the Lan)

IE Brower : IE8-11, Google Chrome, Firefox , Mac Safari

Smart Phone : iPhone, iPad, Android, Android Pad

GENERAL

Housing: Metal

FIXED BULLET NETWORK 4 MP CAMERA DIM436

Dview

SD Card Slot: Optional Internal, Support Max 512GB

Protection Level: IP67


Operation Temperature: -20°C ~ +60°C RH95% Max

Power Supply: DC12V±10%,700mA

Dimension: 169.49 (L) x 70.07 (W) x 67.5 (H) mm

Weight: 600 g

DIMENSIONS

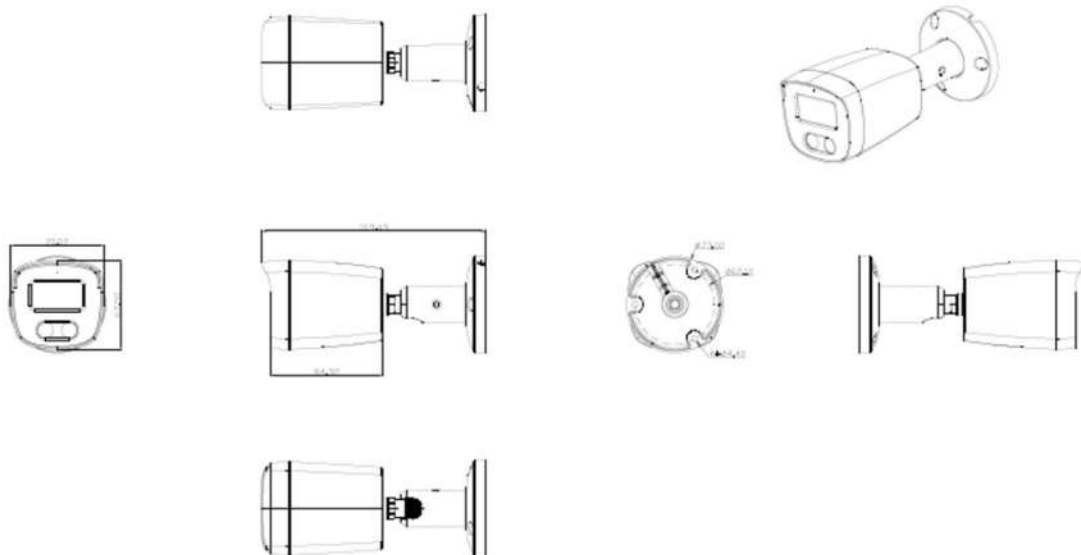

Derechos del autor ©Dley Seguridad Electronica S.A. Todos los derechos reservados.
Dley Seguridad Electronica S.A. puede realizar cambios, mejoras en los productos y servicios,
detener su producción o comercialización en cualquier momento y sin previo aviso.
El logo y la marca son propiedad de Dley Seguridad Electronica S.A.
Para más información puedes visitarnos:
Nuestra website: <https://www.dley.com.ec/> o <https://ventas.dley.com.ec/>
Email: ventas@dley.com.ec
Tel: (+593) 0985178133-0984638941

